



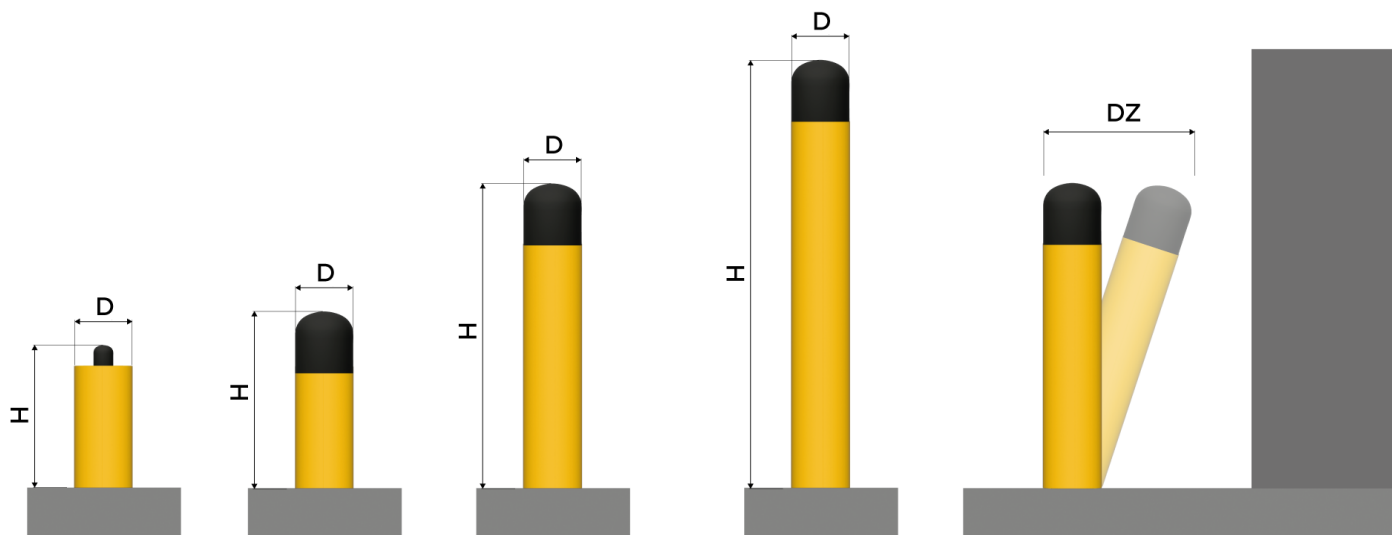

Barevné varianty

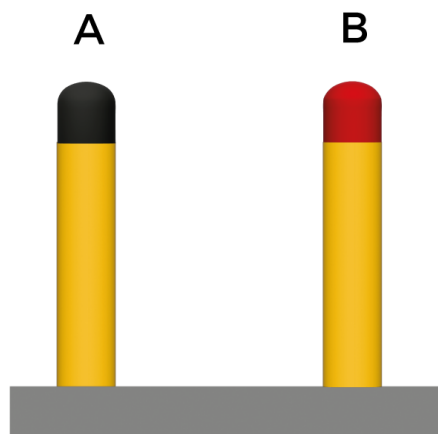

Průměr D - mm	Výška H - mm	Nárazová odolnost jouů	Odolnost kotvení kN	Deformační zóna mm	IP stupeň	Stupeň hořlavosti
100	450	10 500	580	343	59	UL94: HB
120	450	16 850	580	317	59	UL94: HB
140	450	23 950	580	265	59	UL94: HB
120	780	16 850	580	400	59	UL94: HB
140	780	23 950	580	375	59	UL94: HB
120	1110	16 850	580	495	59	UL94: HB

OCHRANNÝ NÁRAZOVÝ SLOUPEK



Průměr D - mm	Výška H - mm	Nárazová odolnost jouů	Odolnost kotvení kN	Deformační zóna mm	IP stupeň	Stupeň hořlavosti
140	1110	23 950	580	450	59	UL94: HB

Řešení na míru a barvy na vyžádání



FLEXAFETM

High-tech průmyslový polymer, flexibilní, netoxický, vhodný pro styk s potravinami.




Kontakt s potravinou



UV záření DIN-EN-ISO 8777-8 Blue Scale




100% recyklovatelný




Rozsah teplot -40° až +50°

ROOTLOCK®


Certifikovaný kotvení systém zaručující nezničení podlahy při nárazu.



Kotvicí systém



Cementová směs



Kotvení otvor
nárazového sloupku

