


OCHRANNÁ NÁRAZOVÁ ZÁBRANA



Barevné varianty

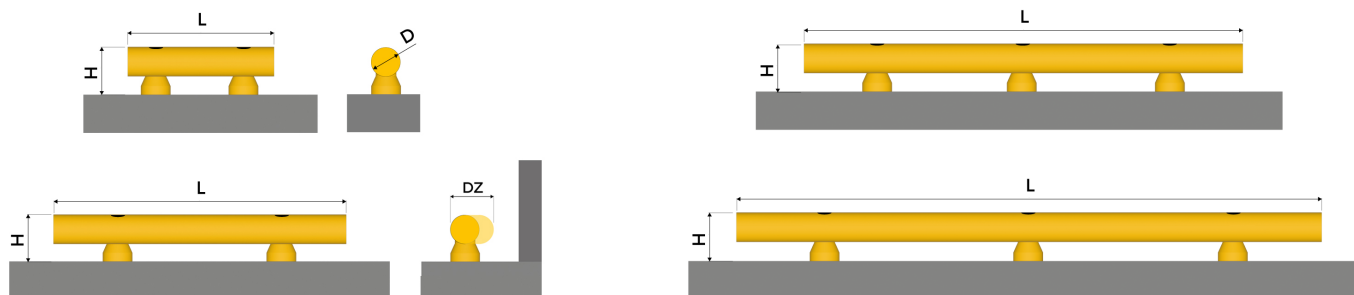

Průměr D - mm	Výška H - mm	Délka L - mm	Nárazová odolnost jouů	Odolnost kotvení kN	Deformační zóna mm	IP stupeň	Stupeň hořlavosti
70	75	500-1000-1500-2000	9 369	190	94	59	UL94: HB
70	130	500-1000-1500-2000	9 369	190	94	59	UL94: HB
100	105	500-1000-1500-2000	19 360	190	140	59	UL94: HB
100	160	500-1000-1500-2000	19 360	190	140	59	UL94: HB
120	125	500-1000-1500-2000	33 950	190	183	59	UL94: HB
120	180	500-1000-1500-2000	33 950	190	183	59	UL94: HB

Řešení na míru a barvy na vyžádání



FLEXAFE™
High-tech průmyslový
polymer, flexibilní,
netoxický, vhodný pro
styk s potravinami.




Kontakt s potravinou



UV záření DIN-EN-ISO
8777-8 Blue Scale



100% recyklovatelný



Rozsah teplot -40° až
+50°


KONTAKT PRO ZÁKAZNÍKY: T +420 607 120 638 | T +420 602 600 168 | E infocz@bambarrier.com |
www.bambarrier.com

OCHRANNÁ NÁRAZOVÁ ZÁBRANA




ROOTLOCK®


Certifikovaný kotevní systém zaručující nezničení podlahy při nárazu.



Kotvící systém



Cementová směs



Kotevní otvor
nárazové zábrany

