


Colour options

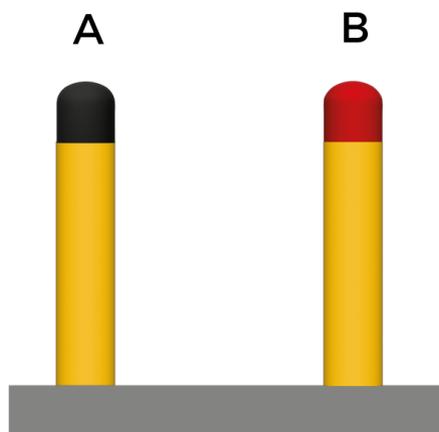

Durchmesser D - mm	Höhe H - mm	Stoßfestigkeit joule	Verankerungswiderstand kN	Verformungszone mm	IP-Klasse	Entflammbarkeitsgrad
100	450	10 500	580	343	59	UL94: HB
120	450	16 850	580	317	59	UL94: HB
140	450	23 950	580	265	59	UL94: HB
120	780	16 850	580	400	59	UL94: HB
140	780	23 950	580	375	59	UL94: HB
120	1110	16 850	580	495	59	UL94: HB
140	1110	23 950	580	450	59	UL94: HB

Kundenspezifische Lösungen und Farben auf Anfrage

FLEXAFE™

Hightech-Industriepolymer, flexibel, ungiftig, für den Kontakt mit Lebensmitteln geeignet.




Kontakt mit
Lebensmitteln



UV-Strahlung DIN-EN-
ISO 8777-8 Blue Scale




100% recycelbar




Temperaturbereich
-40° bis +50°

ROOTLOCK®

Zertifiziertes Verankerungssystem, um sicherzustellen, dass der Boden beim Aufprall nicht beschädigt wird.



Verankerungssystem



Verankerungszement