



# IMPACT SAFETY BOLLARDS

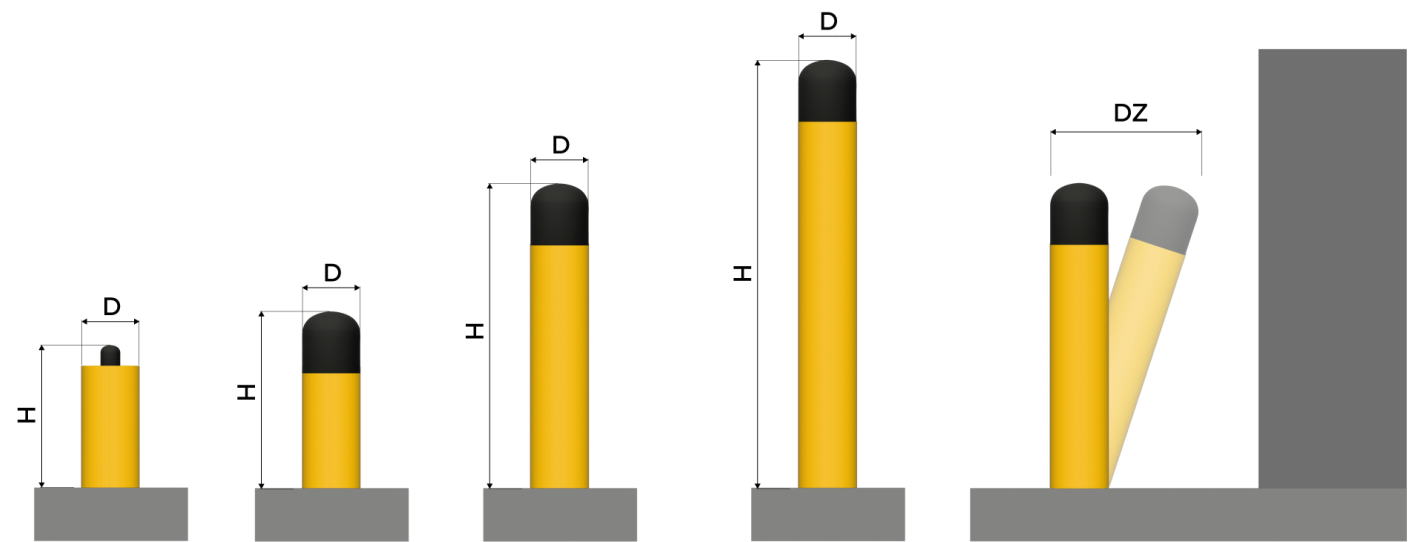

## Colour options

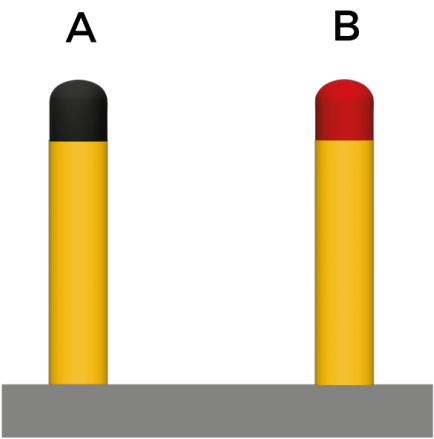

Diameter D - mm	Height H - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
100	450	10 500	580	343	59	UL94: HB
120	450	16 850	580	317	59	UL94: HB
140	450	23 950	580	265	59	UL94: HB
120	780	16 850	580	400	59	UL94: HB
140	780	23 950	580	375	59	UL94: HB
120	1110	16 850	580	495	59	UL94: HB

# IMPACT SAFETY BOLLARDS



Diameter D - mm	Height H - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
140	1110	23 950	580	450	59	UL94: HB

Customized solution and colours upon request

## FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violet Light DIN-EN-ISO 8777-8 Blue Scale




100% recyclable




Temperature Range  
-40° to +50°

## ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.



Cutting-edge  
Anchorage System  
Design



Anti-Shrinkage  
Cement



Anchor hole of the  
impact bollards