



HIGH VISIBILITY BOLLARDS

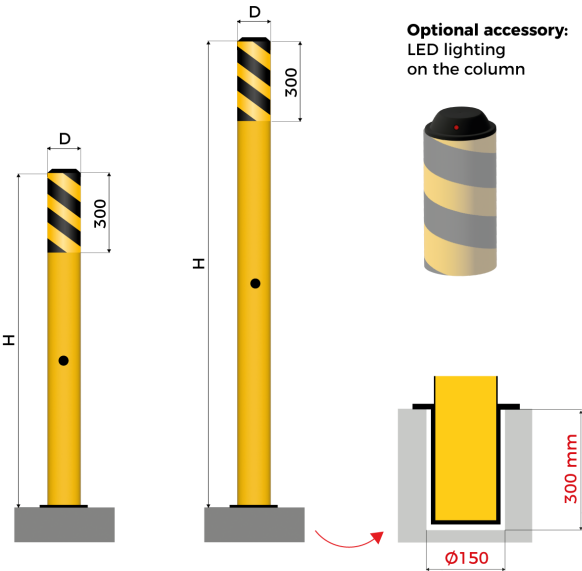

Colour options

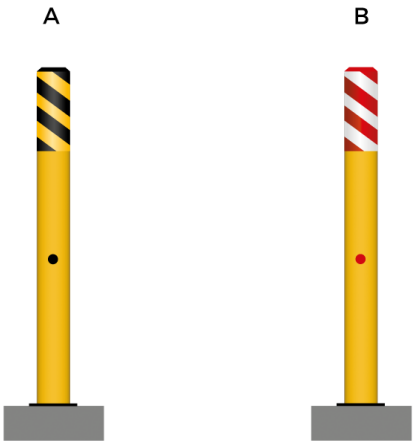

Diameter D - mm	Height H - mm	Resistance Joules	IP Grade	Flame Extinguishing Rate
120	1250	33 950	59	UL94: HB
120	1750	33 950	59	UL94: HB

FLEXAFE™
Cutting-Edge Polymer material,
designed specifically to absorb high-
level impacts in a very small space. It
is food-safe, doesn't break or flake, and
100% recyclable.

