


LOADING DOCK BUFFERS



Description	Technical Data
Construction	Iron Frame – Yellow Comaxite
Stop	Hardened Flexible Rubber
Height	484/650 mm
Depth	275 mm
Width	200 mm
Temperature Range	-30°C +50°C
Movement under Load	Up / Down
Shock Absorber	Mechanical Spring

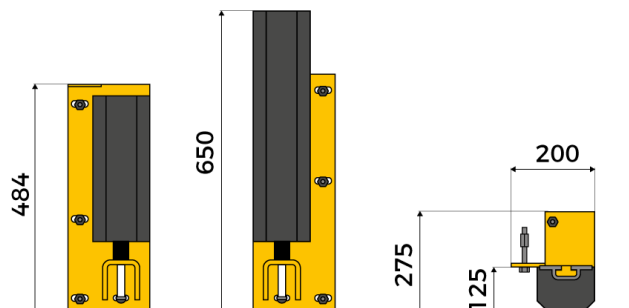

Certified by TÜV SÜD.
Complies with BSI - PAS 13 and UNI 11886.