


TRUCK GUARDS



Colour options

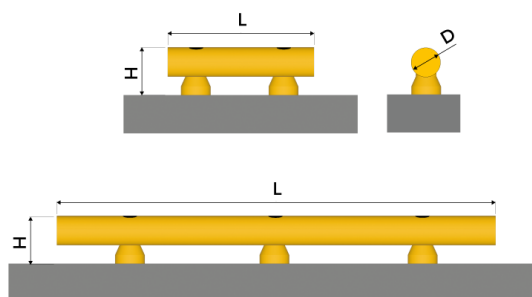

A

B

Diameter D - mm	Height H - mm	Length L - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
120	125	500-1000-1500-2000	33 950	190	183	59	UL94: HB
120	180	500-1000-1500-2000	33 950	190	183	59	UL94: HB

FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violet Light DIN-EN-ISO 8777-8 Blue Scale




100% recyclable




Temperature Range
-40° to +50°

ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.



Cutting-edge
Anchorage System
Design



Anti-Shrinkage
Cement



Anchor hole of the
impact guards