

IMPACT SAFETY GUARDRAILS




DOUBLE



DOUBLE G



TRIPLE

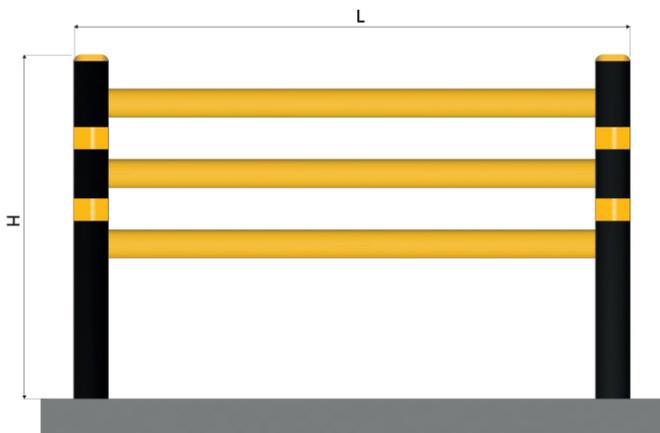


Colour options

A


B

C

D

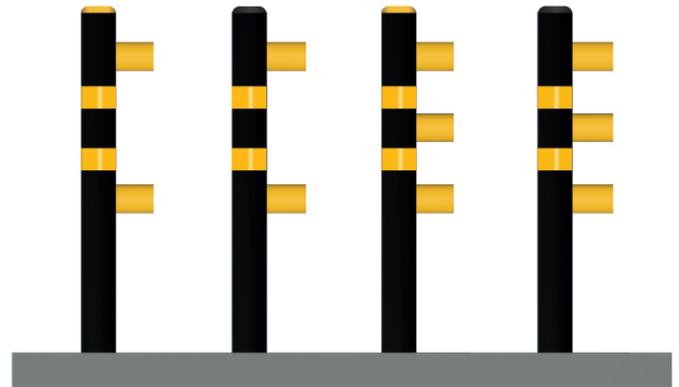

IMPACT SAFETY GUARDRAILS

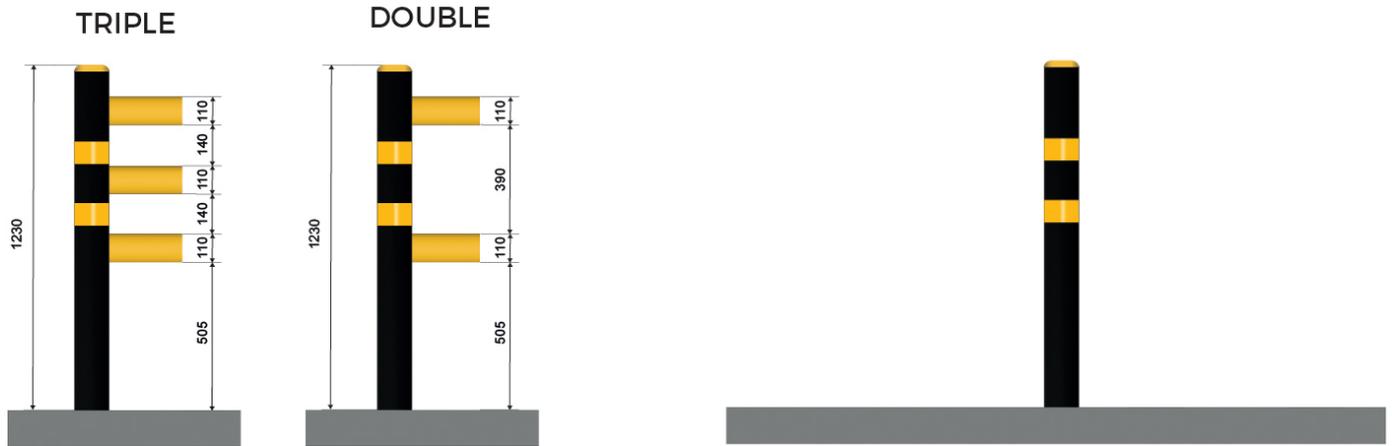

Bollards

Diameter D - mm	Height H - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
125	1230	14 000	580	205	59	UL94: HB

Rails

Number of rails	Diameter D - mm	Height H - mm	Length L - mm	Resistance Joules	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
2	55	110	1000-2000-3000	11 900	250	59	UL94: HB
3	55	110	1000-2000-3000	26 500	250	59	UL94: HB

Guards

Diameter D - mm	Height H - mm	Length L - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
70	130	500-1000-1500-2000	9 369	190	94	59	UL94: HB
100	160	500-1000-1500-2000	19 360	190	140	59	UL94: HB
120	180	500-1000-1500-2000	33 950	190	183	59	UL94: HB

Customized solution and colours upon request

FLEXAFE™

Cutting-Edge Polymer material,

CONTACT FOR CUSTOMER SOLUTIONS: T +39 347 46 74 056 | T +420 607 120 638 | E info@bambarrier.com | www.bambarrier.com

IMPACT SAFETY GUARDRAILS



designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violet Light DIN-EN-ISO 8777-8 Blue Scale




100% recyclable




Temperature Range
-40° to +50°

ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.




Cutting-edge Anchorage System Design



Anti-Shrinkage Cement



Anchor hole of the impact bollards



Anchor hole of the impact guards