
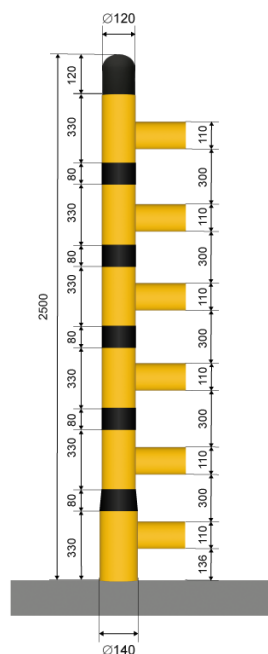


BAM | BARRIER
PROTECTS WORKPLACE

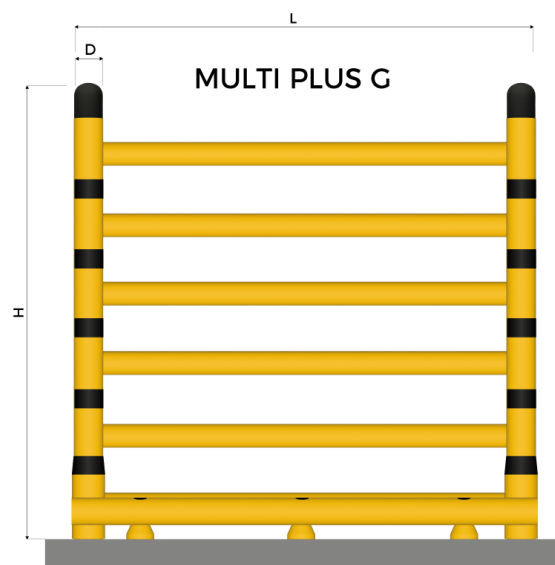

Diameter D - mm	Height H - mm	Width L - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
140/120	1270-4140	1000-2000-3000	23 950	580	450	59	UL94: HB

Number of rails	Diameter D - mm	Height H - mm	Length L - mm	Resistance Joules	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
-----------------	-----------------	---------------	---------------	-------------------	----------------------	----------	--------------------------

CONTACT FOR CUSTOMER SOLUTIONS: T +39 347 46 74 056 | T +420 607 120 638 | E info@bambarrier.com | www.bambarrier.com

HIGH IMPACT SAFETY GUARDRAILS MULTI PLUS



Number of rails	Diameter D - mm	Height H - mm	Length L - mm	Resistance Joules	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
3+	55	110	1000-2000-3000	26 500	250	59	UL94: HB

Guards

Diameter D - mm	Height H - mm	Length L - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
70	130	500-1000-1500-2000	9 369	190	94	59	UL94: HB
100	160	500-1000-1500-2000	19 360	190	140	59	UL94: HB
120	180	500-1000-1500-2000	33 950	190	183	59	UL94: HB

Customized solution and colours upon request



Certified by TÜV SÜD.
Complies with BSI - PAS 13 and UNI 11886.

FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violet
Light DIN-EN-ISO 8777-8
Blue Scale




100% recyclable




Temperature Range -40°
to +50°

ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.




Cutting-edge
Anchorage
System Design



Anti-Shrinkage
Cement



Anchor hole of
the impact
bollards



Anchor hole of
the impact
guards



BAM BARRIER
CRASH TEST LAB

CONTACT FOR CUSTOMER SOLUTIONS: T +39 347 46 74 056 | T +420 607 120 638 | E info@bambarrier.com | www.bambarrier.com