


# HIGH IMPACT SAFETY GUARDS



## Colour options

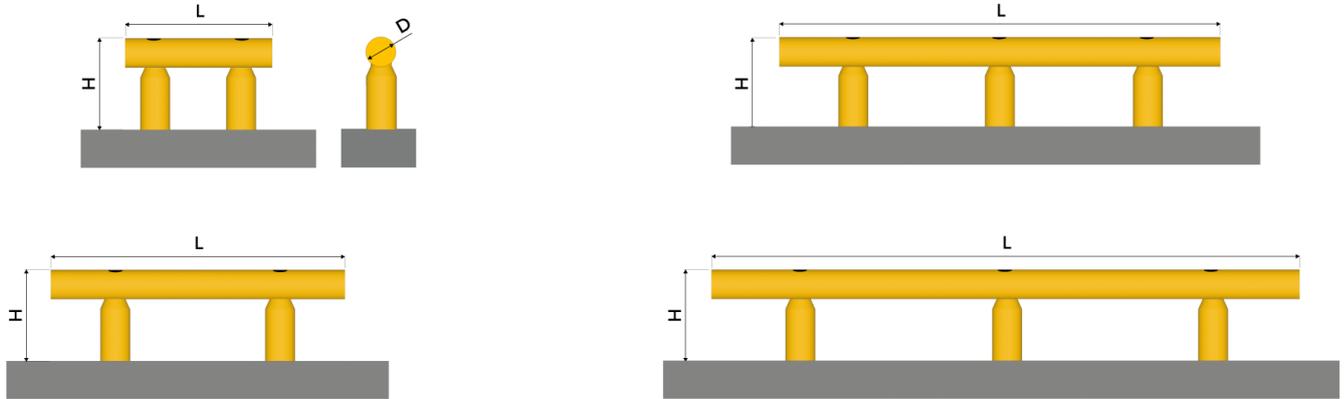

Diameter D - mm	Height H - mm	Length L - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
70	225	500-1000-1500-2000	9 369	190	94	59	UL94: HB
70	270	500-1000-1500-2000	9 369	190	94	59	UL94: HB
100	250	500-1000-1500-2000	19 360	190	140	59	UL94: HB
100	300	500-1000-1500-2000	19 360	190	140	59	UL94: HB
120	295	500-1000-1500-2000	33 950	190	183	59	UL94: HB
120	365	500-1000-1500-2000	33 950	190	183	59	UL94: HB

## Customized solution and colours upon request

### FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violate Light DIN-EN-ISO 8777-8 Blue Scale



100% recyclable



Temperature Range -40° to +50°


### ROOTLOCK®

World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles


# HIGH IMPACT SAFETY GUARDS




impacts without damaging the floor.



Cutting-edge  
Anchorage System  
Design



Anti-Shrinkage  
Cement



Anchor hole of the  
impact guards