



HEIGHT RESTRICTION BARRIERS



HEIGHT RESTRICTION BARRIERS

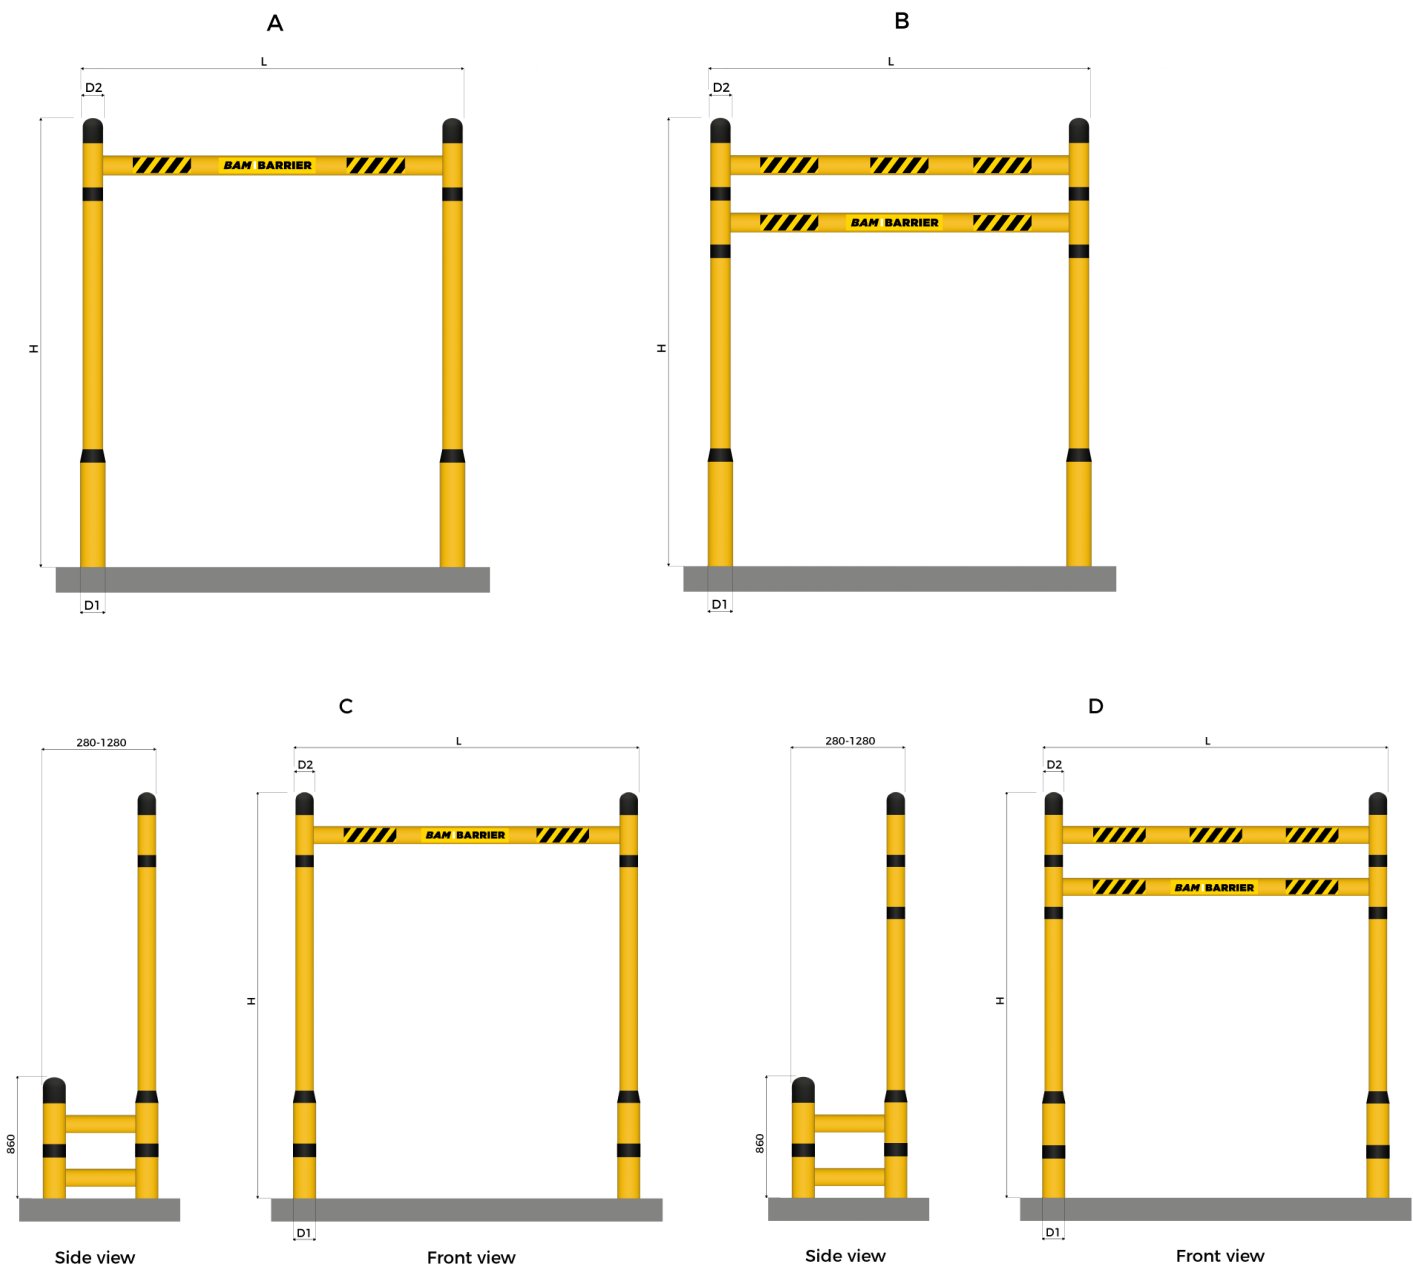

Colour options

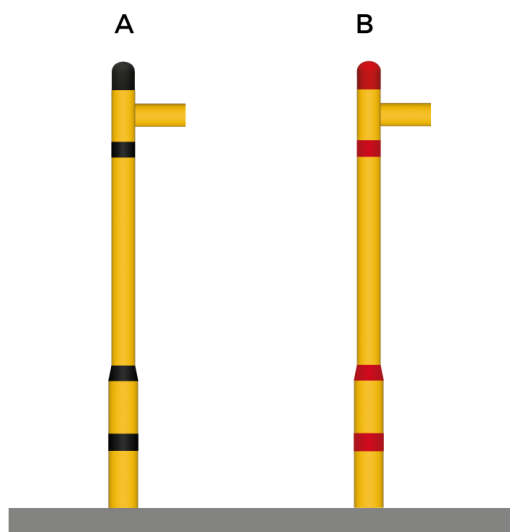

Bollards

Diameter D1/D2 - mm	Height H - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
140/120	1600-4080	23950	60	1 370	59	UL94: HB

Rails

Diameter mm	Height H - mm	Length L - mm	Resistance Joules	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
55	110	2000-3000-4000	7 930	250	59	UL94: HB

Customized solution and colours upon request

FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violate Light DIN-EN-ISO 8777-8 Blue Scale




100% recyclable





Temperature Range -40° to +50°

ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.



Cutting-edge



Anti-Shrinkage



Anchor hole of the

CONTACT FOR CUSTOMER SOLUTIONS: T +39 347 46 74 056 | T +420 607 120 638 | E info@bambarrier.com | www.bambarrier.com

HEIGHT RESTRICTION BARRIERS



Anchorage System
Design

Cement

impact bollards