



# HEIGHT RESTRICTION BARRIERS



# HEIGHT RESTRICTION BARRIERS

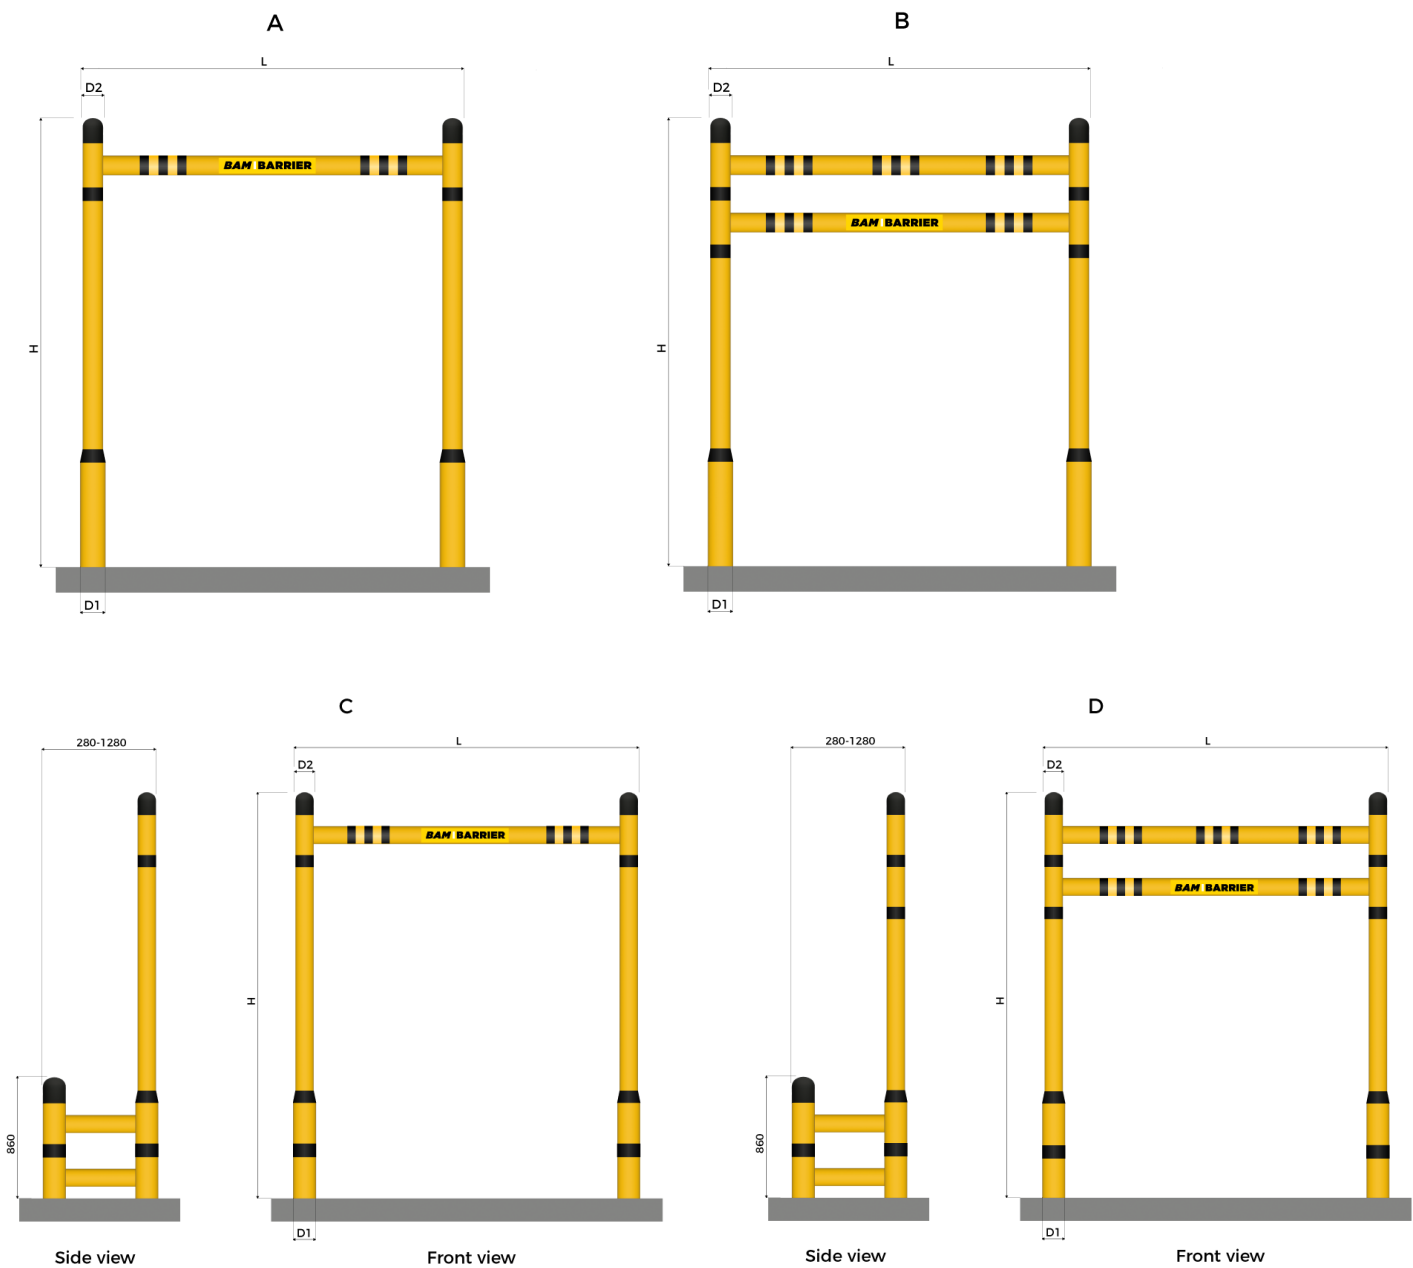

## Colour options

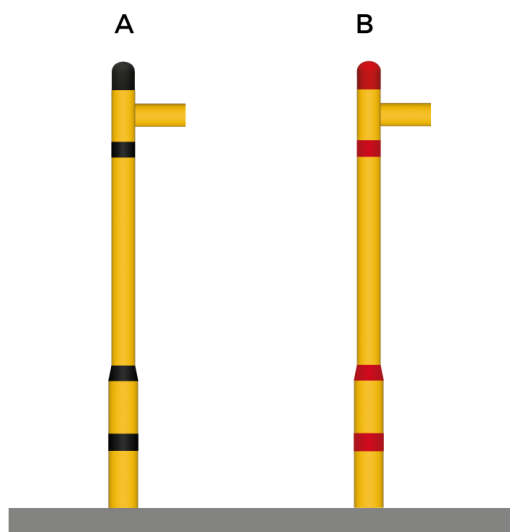

## Bollards

Diameter D1/D2 - mm	Height H - mm	Resistance Joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
140/120	1600-4080	23950	60	1 370	59	UL94: HB

## Rails

Type	Diameter mm	Height H - mm	Length L - mm	Resistance Joules	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
A, C	55	110	2000-3000-4000	7 930	250	59	UL94: HB
B, D	55	110	2000-3000-4000	11 900	250	59	UL94: HB

## Customized solution and colours upon request

### FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violate Light DIN-EN-ISO 8777-8 Blue Scale



100% recyclable



Temperature Range  
-40° to +50°

### ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles

**CONTACT FOR CUSTOMER SOLUTIONS:** T +39 347 46 74 056 | T +420 607 120 638 | E [info@bambarrier.com](mailto:info@bambarrier.com) | [www.bambarrier.com](http://www.bambarrier.com)


# HEIGHT RESTRICTION BARRIERS




impacts without damaging the floor.



Cutting-edge  
Anchorage System  
Design



Anti-Shrinkage  
Cement



Anchor hole of the  
impact bollards