


HIGH VISIBILITY BOLLARDS



Colour options

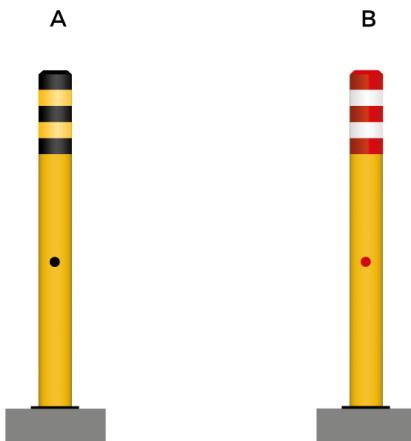

Diameter D - mm	Height H - mm	Resistance joules	IP Grade	Flame Extinguishing Rate
120	1250	33 950	59	UL94: HB
120	1750	33 950	59	UL94: HB

FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.



FOOD SAFE



Resistance to Ultra-Violet Light DIN-EN-ISO 8777-8 Blue Scale



100% recyclable



Temperature Range
-40° to +50°