
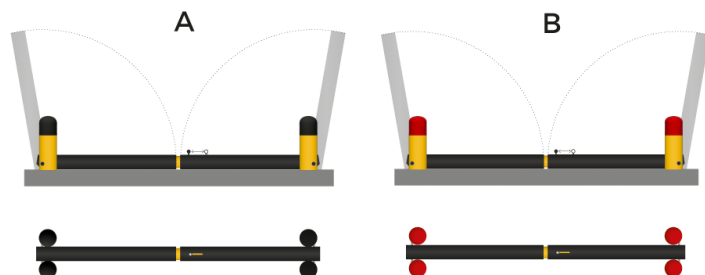


DOCK LIFTING BARRIERS

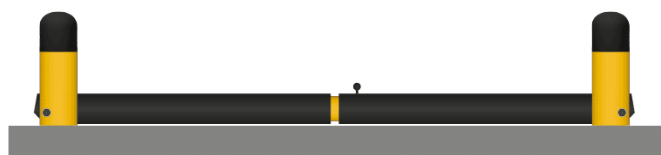

Bollards

Diameter D - mm	Height H - mm	Resistance joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
120	450	16 850	580	317	59	UL94: HB
140	450	23 950	580	265	59	UL94: HB

Lifting Guards

Diameter D - mm	Length L - mm	Resistance joules	IP Grade	Flame Extinguishing Rate
125	2000-6000	23 250	59	UL94: HB

Customized solution and colours upon request



Certifié par TÜV SÜD.
Conforme aux normes BSI - PAS 13 et UNI 11886.

FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violet
Light DIN-EN-ISO 8777-8
Blue Scale




100% recyclable




Temperature Range -40°
to +50°

ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.



Cutting-edge
Anchorage System
Design



Anti-Shrinkage
Cement



Anchor hole of the
impact bollards



BAM BARRIER CRASH
TEST LAB

DOCK LIFTING BARRIERS

