


# IMPACT SAFETY GUARDRAILS WITH REMOVABLE RAILS

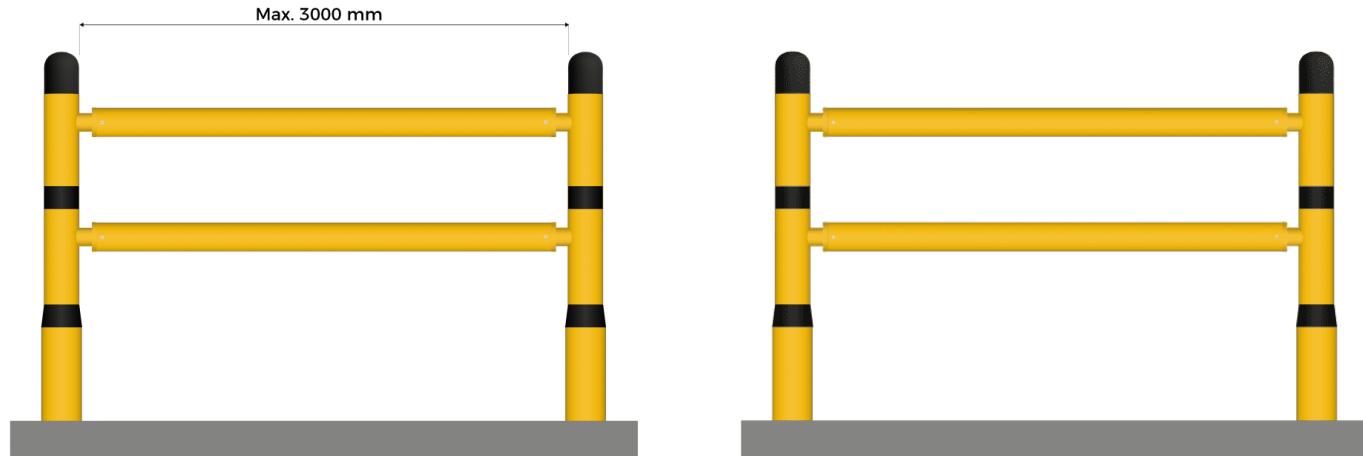

## Bollards

Diameter D - mm	Height H - mm	Resistance joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
140/120	1270	23 950	580	450	59	UL94: HB

## Rails

Number of rails	Diameter D - mm	Height H - mm	Length L - mm	Resistance joules	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
2	55	110	1000-2000-3000	7930	250	59	UL94: HB

Customized solution and colours upon request

### FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




FOOD SAFE



Resistance to Ultra-Violet Light DIN-EN-ISO 8777-8 Blue Scale



100% recyclable



Temperature Range  
-40° to +50°

### ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.



Cutting-edge Anchorage System Design




Anti-Shrinkage Cement



Anchor hole of the impact bollards

# IMPACT SAFETY GUARDRAILS WITH REMOVABLE RAILS



Anchor hole of the  
impact guards