


DOUBLE IMPACT SAFETY GUARDRAILS



Colour options

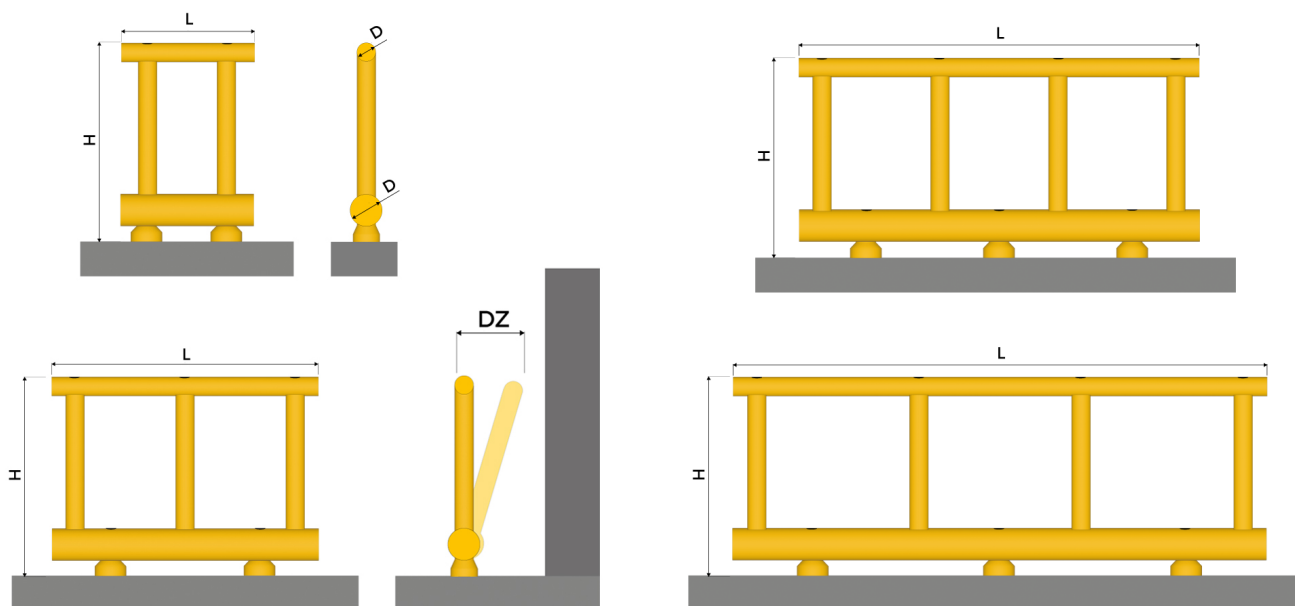

Diameter D - mm	Height H - mm	Length L - mm	Resistance joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
70/70	450	500-1000-1500-2000	9 369	190	94	59	UL94: HB
70/70	750	500-1000-1500-2000	9 369	190	94	59	UL94: HB
70/70	1000	500-1000-1500-2000	9 369	190	94	59	UL94: HB
100/70	450	500-1000-1500-2000	19 360	190	140	59	UL94: HB
100/70	750	500-1000-1500-2000	19 360	190	140	59	UL94: HB
100/70	1000	500-1000-1500-2000	19 360	190	140	59	UL94: HB
120/70	450	500-1000-1500-2000	33 950	190	183	59	UL94: HB
120/70	750	500-1000-1500-2000	33 950	190	183	59	UL94: HB
120/70	1000	500-1000-1500-2000	33 950	190	183	59	UL94: HB

Customized solution and colours upon request



Certifié par TÜV SÜD.
Conforme aux normes BSI - PAS 13 et UNI 11886.

CONTACT FOR CUSTOMER SOLUTIONS: T +39 347 46 74 056 | E info@bambarrier.com | www.bambarrier.com

DOUBLE IMPACT SAFETY GUARDRAILS



FLEXAFE™

Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.



FOOD SAFE



Resistance to Ultra-Violate
Light DIN-EN-ISO 8777-8
Blue Scale




100% recyclable




Temperature Range -40°
to +50°

ROOTLOCK®


World's most advanced and safe Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.



Cutting-edge
Anchorage System
Design



Anti-Shrinkage
Cement



Anchor hole of the
impact guards



BAMBARRIER CRASH
TEST LAB